

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 October 2003 (30.10.2003)

PCT

(10) International Publication Number
WO 03/089065 A1

(51) International Patent Classification⁷: **A62C 35/08**, 37/08

(21) International Application Number: PCT/FI03/00269

(22) International Filing Date: 10 April 2003 (10.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20020758 19 April 2002 (19.04.2002) FI

(71) Applicant (for all designated States except US): **MAR-IOFF CORPORATION OY** [FI/FI]; P.O.BOX 25, Hakamäenkuja 4, FIN-01511 Vantaa (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SUNDHOLM, Göran** [FI/FI]; Ilmari Kiannon kuja 3, FIN-04310 Tuusula (FI).

(74) Agent: **HEINÄNEN OY**; Annankatu 31-33 C, FIN-00100 Helsinki (FI).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: VALVE ELEMENT

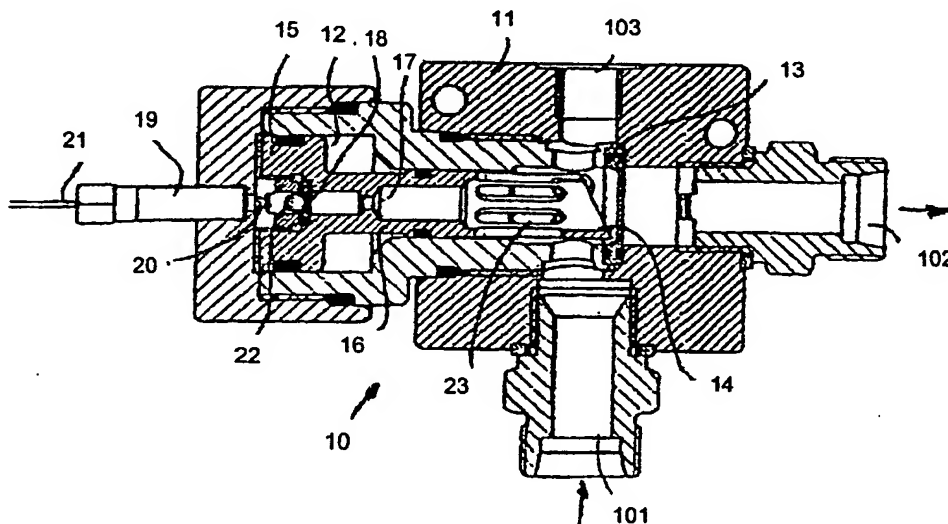

(57) **Abstract:** Valve element (10), comprising a main body, at least one inlet (101) and at least one outlet (102), a passage connecting the inlet and outlet, at least one burst disk (rupture disk) (13) or equivalent, which, when unbroken, closes the passage from inlet to outlet, and a piston element (15) provided with a piercing element (14) or the like for piercing the burst disk. The piston element (15) is provided with a passage (17) for a pressure medium, said passage extending axially through the piston element from one first side to one second side, that the piston element is provided with a second burst disk or equivalent which, when unbroken, closes the passage (17) provided in the piston element.

WO 03/089065 A1